


Uniktryk Shield

Beskyttelseslaminat · AG900

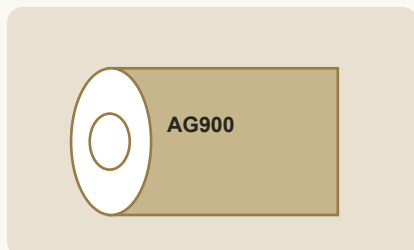

Skematisk illustration af materialet; ikke en farveprøve.

DOKUMENTEREDE SYMBOLER

Denne variant har ingen af katalogets generelle symboler registreret her. Se de konkrete egenskaber nedenfor og det originale datablad.

Materialets egne egenskaber: Skånsom pleje · Materialebestemt levetid

Sådan passer du på dit Uniktryk

01 Uniktryks skånsomme plejeråd: vask i hånden med en blød klud, vand og et mildt rengøringsmiddel, der er egnet til overfladen. Skyl og tør forsigtigt.

02 Undgå slibemidler, hårde børster og at rette højtryksstråler mod foliekanter. Brug ikke opløsningsmidler eller graffiti-fjerner uden bekræftet kompatibilitet for den konkrete folie.

03 Kontrollér kanter efter brug. Fjern mudder nænsomt; gnid ikke sand hen over overfladen. Lad varme dele køle af inden rengøring.

04 Anti-graffiti-egenskaber betyder ikke, at alle rensemidler er egnede. Kontakt os før fjernelse af graffiti, så middel og metode kan kontrolleres.

Den mest skånsomme begrænsning på tøjets etiket eller i den konkrete produktkombination gælder. Kontakt os ved skader; undlad selv at varme eller lime.

Materiale, egenskaber og ansvarligt valg

Holdbarheden afhænger af underlag, montering, eksponering og brug. Det originale tekniske datablad følger som bilag.

Liner og affaldssortering skal kontrolleres på den konkrete rulle. Papir, PE og PET er forskellige materialer.

Før produktion kontrollerer Uniktryk den præcise reference, underlag, materialekombination og monteringsmetode. Følg den konkrete pleje. Symboler er ikke en generel garanti eller tilladelse til andre anvendelser. Kilde: katalog 2026, trykt side 26, samt det vedlagte datablad.

Producentens CSR-temaer: Miljøpåvirkning · Etik og lokalsamfund · Ansvarlig innovation · Arbejdsvilkår.

Temaerne er virksomhedsindsatser, ikke fire produktcertifikater. Målet om 55 % lavere GHG-udledning i 2050 er producentens fremtidige mål, ikke dette produkts dokumenterede klimaaftryk. Kilde: katalog 2026, trykte sider 18-21.



Scan til den aktuelle vejledning

De følgende sider er producentens originale tekniske datablad. Produktkoder og kildeangivelser er bevaret, så materialet kan spores. Vejledningen begrænser ikke dine lovbestemte rettigheder.

AG900



PRODUCT DESCRIPTION:

Film composed of a 100-µm polyester with anti-scratch/anti-graffiti coating and with a pressure-sensitive adhesive. UV-proof. Glossy surface finish; intended for cold laminating.

FILM FEATURES:

• Thickness	(Indicative value) 100 µm
• Tensile strength	(Indicative value) 28 kg/cm²
• Elongation at break	(Indicative value) 125 %
• UV rejection (%) :	(Indicative value) > 99

LINER:

- Silicone-coated PET liner.
- Stable under hygrometric variations

ADHESIVE:

- Immediate and permanent adhesion; suitable for wet application.

USER'S INSTRUCTIONS:

- Recommended minimum application temperature: +15 °C (+59 °F)
- Operating temperature range: -40 °C to +90 °C (-40 °F to +194 °F)
- Prior to any application of the film to a substrate prone to degassing, it is the responsibility of the prescriber and applicator to verify the compatibility between film/complex/substrate, to carry out an optimal substrate degassing (synthetic glass such as PMMA) and to ensure optimal drying time for the inks or paintworks. The applicator is liable for any appearance of bubbles due to substrate degassing.
- In the case of lamination, please make sure to adjust the laminator to the minimum tension.
- Once laminated, the compound must be stored and transported on a core with a diameter exceeding 76 mm when wound.
- To clean the film, use a non-abrasive sponge or soft cloth with acetone, alcohol, soapy water or HEX'AG.
- In the case of an already painted substrate, self-adhesive media must only be applied to undamaged original paintwork. If the paintwork is not original and/or damaged, the application and the removal are at the judgement and risk of the installer.

STORAGE:

- | | |
|---|--|
| <p>Storage period before use
3 years</p> | <p>Storage area
in a dust-free environment</p> |
| <p>Storage temperature
+15 °C to +25 °C (+59 °F to +77 °F)</p> | <p>Orientation of rolls before use
horizontally</p> |
| <p>Relative humidity during storage
with relative humidity of 50 %</p> | |

DURABILITY:

- Vertical exposure (graffiti-free film, not cleaned using solvents):
Outdoors: Central European climate: up to 4 years;
Mediterranean climate: up to 2 years.
- Indoors: 12 years.

**DURABILITY:**

To find the indicative durabilities of the films for any other exposure and geographical area, please refer to the «Conversion rules for indicative durabilities according to geographical area» chart available under Durability, on the «Professionals» pages on our site www.hexis-graphics.com.

CERTIFICATION:

Fire-smoke classification



Fire-smoke classification standard

EN 13501-1:2018

Fire-smoke classification protocol no.

P215319 DEC/6

Reach compliance

The AG900 film complies with REACH. It does not contain any substances referenced in ECHA's list of SVHC (Substances of very high concern).

NOTES:

Due to the great variety of substrates and the growing number of new applications, the installer must check the suitability of the medium for each application. All of the published information is based on measurements regularly performed in the laboratory. The published information does not however constitute a binding guarantee. The seller cannot be held liable for indirectly related damages and assumes no liability for claims that are higher than the replacement value of the purchased product. All specifications are subject to potential changes without prior notice. Our specifications are automatically updated on our website www.hexis-graphics.com.

