


Uniktryk Velvet

Flocktryk på tekstil · FLOCK200

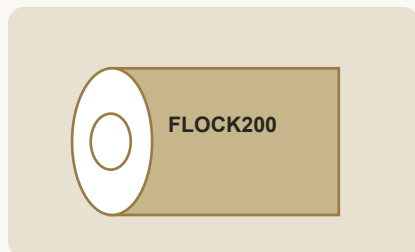

Skematisk illustration af materialet; ikke en farveprøve.

DOKUMENTEREDE SYMBOLER



PVC-fri film

Materialets egne egenskaber: Velvet-effekt · PVC-fri film · 60 °C maks.

Sådan passer du på dit Uniktryk

01 Vask ved højst 60 °C, hvis tøjet tillader det. Vælg et kulørtprogram under 50 minutter og lav centrifugering. Brug vaskemiddel uden klorblegemiddel.

02 Må ikke tørretumbles. Lufttør tøjet.

03 Stryg ved lav temperatur uden damp, med vrangen ud eller med et beskyttende klæde over trykket.

Den mest skånsomme begrænsning på tøjets etiket eller i den konkrete produktkombination gælder. Kontakt os ved skader; undlad selv at varme eller lime.

Materiale, egenskaber og ansvarligt valg

Fløjsagtig tekstilfolie. PVC-fri film er angivet i producentens katalog 2026. Det er ikke dokumentation for, at hele slutproduktet er PVC-frit.

Liner og affaldssortering skal kontrolleres på den konkrete rulle. Papir, PE og PET er forskellige materialer.

PVC-FRI: Gælder den dokumenterede film; ikke automatisk blæk, lim, laminat eller hele produktet.

Før produktion kontrollerer Uniktryk den præcise reference, underlag, materialekombination og monteringsmetode. Følg den konkrete pleje. Symboler er ikke en generel garanti eller tilladelse til andre anvendelser. Kilde: katalog 2026, trykt side 26, samt det vedlagte datablad.

Producentens CSR-temaer: Miljøpåvirkning · Etik og lokalsamfund · Ansvarlig innovation · Arbejdsvilkår.

Temaerne er virksomhedsindsatser, ikke fire produktcertifikater. Målet om 55 % lavere GHG-udledning i 2050 er producentens fremtidige mål, ikke dette produkts dokumenterede klimaaftryk. Kilde: katalog 2026, trykte sider 18-21.



Scan til den aktuelle vejledning

De følgende sider er producentens originale tekniske datablad. Produktkoder og kildeangivelser er bevaret, så materialet kan spores. Vejledningen begrænser ikke dine lovbestemte rettigheder.



FLOCK 200



PRODUCT DESCRIPTION:

500-µm, PVC-free film, suitable for hot transfer applications to cotton and polyester. Soft velvety texture.

FILM FEATURES:

- Film thickness

(Indicative value)

500 µm

LINER:

- 100-µm polyester backing paper.

APPLICATION GUIDE FOR FLEX:

- Good adhesion to cotton and polyester.

Carry out a test to check the resistance of the fabric to the press temperature and the compatibility of the flex film with the cloth.

Cutting and weeding



- Cut the mirror image with the plotter using a 60° blade.
- Weed after cutting.



Pressing temperature
150 °C (302 °F)



Pressing duration
15 secondes



Pressing strength
moderate pressure

- After pressing, carefully remove the protector (liner) while the flex film is still:



Protector removal
hot

- For more information on the application method of FLOCK 200, please refer to the Application Guide on the «Professionals» pages, on our website www.hexis-graphics.com.

Washing temperature

with a maximum of 60 °C (140 °F)



Washing conditions

Use laundry products without chlorine bleach. Choose a colour wash program of less than 50 minutes and with a low spinning speed.



Drying conditions

Tumble drying is prohibited.



Ironing conditions

Iron the textile inside out or protect the flex film with a pressing cloth, at low temperature, without using steam.



STORAGE:



Storage period before use
1 year



Storage temperature
+15 °C to +25 °C (+59 °F to +77 °F)



Relative humidity during storage

with relative humidity between 30 % and 70 %



Storage method before use

in its unopened original packaging

NOTES:

Due to the great variety of substrates and the growing number of new applications, the installer must check the suitability of the medium for each application. All of the published information is based on measurements regularly performed in the laboratory. The published information does not however constitute a binding guarantee. The seller cannot be held liable for indirectly related damages and assumes no liability for claims that are higher than the replacement value of the purchased product. All specifications are subject to potential changes without prior notice. Our specifications are automatically updated on our website www.hexis-graphics.com.