Uniktryk MX Struktur

Struktureret motocrosslaminat · XTWHOOPS

Skematisk illustration af materialet; ikke en farveprøve.

DOKUMENTEREDE SYMBOLER

Denne variant har ingen af katalogets generelle symboler registreret her. Se de konkrete egenskaber nedenfor og det originale datablad.

Materialets egne egenskaber: Skånsom pleje · Materialebestemt levetid

Sådan passer du på dit Uniktryk

01 Uniktryks skånsomme plejeråd: vask i hånden med en blød klud, vand og et mildt rengøringsmiddel, der er egnet til overfladen. Skyl og tør forsigtigt.

02 Undgå slibemidler, hårde børster og at rette højtryksstråler mod foliekanter. Brug ikke opløsningsmidler eller graffiti-fjerner uden bekræftet kompatibilitet for den konkrete folie.

03 Kontrollér kanter efter brug. Fjern mudder nænsomt; gnid ikke sand hen over overfladen. Lad varme dele køle af inden rengøring.

04 Rengør strukturen nænsomt med en blød klud. Produktet er til kortvarig konkurrencebrug; struktur og tykkelse gør ikke grafikken modstandsdygtig mod alle stenslag eller styrt.

Den mest skånsomme begrænsning på tøjets etiket eller i den konkrete produktkombination gælder. Kontakt os ved skader; undlad selv at varme eller lime.

Materiale, egenskaber og ansvarligt valg

Holdbarheden afhænger af underlag, montering, eksponering og brug. Det originale tekniske datablad følger som bilag.

Liner og affaldssortering skal kontrolleres på den konkrete rulle. Papir, PE og PET er forskellige materialer.

Før produktion kontrollerer Uniktryk den præcise reference, underlag, materialekombination og monteringsmetode. Følg den konkrete pleje. Symboler er ikke en generel garanti eller tilladelse til andre anvendelser. Kilde: katalog 2026, trykt side 26, samt det vedlagte datablad.

Producentens CSR-temaer: Miljøpåvirkning · Etik og lokalsamfund · Ansvarlig innovation · Arbejdsvilkår.

Temaerne er virksomhedsindsatser, ikke fire produktcertifikater. Målet om 55 % lavere GHG-udledning i 2050 er producentens fremtidige mål, ikke dette produkts dokumenterede klimaaftryk. Kilde: katalog 2026, trykte sider 18-21.

Scan til den aktuelle vejledning

De følgende sider er producentens originale tekniske datablad. Produktkoder og kildeangivelser er bevaret, så materialet kan spores. Vejledningen begrænser ikke dine lovbestemte rettigheder.

XTWHOOPS

XTWHOOPS : A COMPLETER

PRODUCT DESCRIPTION:

Film composed of a 350-µm, transparent, calendered, monomeric PVC with an embossed surface. The film is coated with a pressure-sensitive acrylic adhesive. For cold-laminating digital printing films intended to be used as kits for decoration on motorcycles, ATVs, jet-skis etc. used under extreme conditions.

FILM FEATURES:

· Thickness	(Indicative value) **350 µm**	
· Tensile strength	(Average values) **min. 80 N/25 mm**	Method **HEXNFX41021**
· Elongation at break	(Average values) **min. 100 %**	Method **HEXNFX41021**
· Shrinkage 168 hours at 70 °C (158 °F)	(Average values) **< 1.5 mm**	Method **HEXRET001**

LINER:

- Silicone-coated Kraft paper 87 g/m² with grey HEXIS print.
- Stable under hygrometric variations

ADHESIVE PROPERTIES:

(Measured average values at publication of the technical data sheet)

- Peel strength test at 180°; Measurement support glass

after 20 minutes of application	(Average values) **21 N/25 mm**	Method **HEXFTM001**
after 24 hours of application	(Average values) **26 N/25 mm**	Method **HEXFTM001**
· Initial tack	(Average values) **35 N/25 mm**	Method **HEXFTM009**
· Release	(Average values) **0.2 N/25 mm**	Method **HEXFTM003**

- The adhesive is resistant to most chemicals (alcohol, diluted acids, oils).

ADHESIVE:

- Solvent-based acrylic adhesive.
- Immediate and permanent adhesion; suitable for wet application.

USER'S INSTRUCTIONS:

- Recommended minimum application temperature: +10 °C to +35 °C (+50 °F to +95 °F)
- Operating temperature range: -30 °C to +60 °C (-22 °F to +140 °F)

- It is recommended to use it in combination with the digital printing film XTPRINT as a «motorcycle kit».
- Resistance against mechanical stress (impact of gravel, scratches etc.) or water splashing due to extreme sports such as trials, rallies or surface water sports.
- In the case of an already painted substrate, apply to undamaged original paintwork only. If the paintwork is not original and/or damaged, the application and the removal are at the judgement and risk of the installer.

FTP.IMN.328.B 02.24

Uniktryk 2026 / rev. 5 - originalt producentbilag, rettigheder respekteres

STORAGE:

Storage period before use
1 year

Storage area
in a dust-free environment

Storage temperature
+15 °C to +25 °C (+59 °F to +77 °F)

Storage method before use
in its original packaging

Relative humidity during storage
with relative humidity of 50 %

Orientation of rolls before use
vertically

DURABILITY: (Central European climate)

- Vertical outdoor exposure:
  Without mechanical stress: Up to 2* years.
  With mechanical stress: depends on the type and frequency of the stresses.

*Time during which the film retains a correct surface finish, from a conventional viewing distance. (A slight and gradual change in colour and gloss is a natural and inevitable phenomenon inherent in the natural breakdown of the materials.)

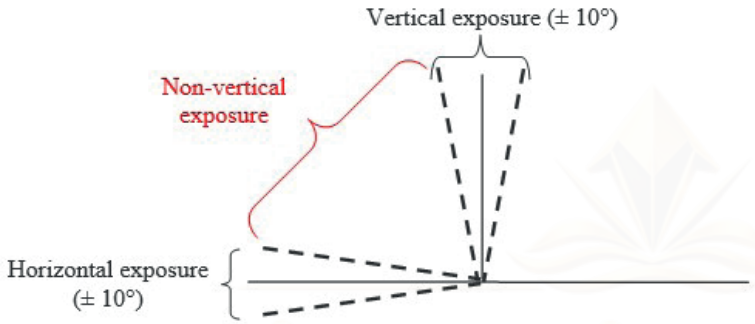

Note: The durability indicated in this document:
- concerns only the laminate and not the finished visual or graphic.
- is inherent in an upright position of ± 10° and in the product's geographical exposure position. Any other position accentuates climatic influences and an alteration in gloss or colour, or even a slight dusting may appear. Southern exposure, with a 45° inclination may divide the durability of the film by 2, and horizontal exposure by 2.8. Application to the vehicle bonnet is particularly severe, due to the horizontal exposure and the heat from the engine.
- is confirmed by UV ageing tests and vertical natural outdoor weathering.

To find the indicative durabilities of the films for any other exposure and geographical area, please refer to the «Conversion rules for indicative durabilities according to geographical area» chart available under Durability, on the «Professionals» pages on our site www.hexis-graphics.com.

NOTES:

Due to the great variety of substrates and the growing number of new applications, the installer must check the suitability of the medium for each application. The measuring methods for the standards quoted above served as the basis for the development of our own measuring methods, which are available on request. Please feel free to contact us to get the latest instructions in use. All of the published information is based on measurements regularly performed in the laboratory. The published information does not however constitute a binding guarantee. The seller cannot be held liable for indirectly related damages and assumes no liability for claims that are higher than the replacement value of the purchased product. All specifications are subject to potential changes without prior notice. Our specifications are automatically updated on our website www.hexis-graphics.com.

FTP.IMN.328.B 02.24

Uniktryk 2026 / rev. 5 - originalt producentbilag, rettigheder respekteres